


Diagram 5

Above Ground Plumbing - Equipment Model:(MTM-2500)

Important (please read):

The discharge pump (provided) is capable of pumping 12' in height and 48' in total length (60' of head pressure or approximately 30 PSI). The discharge pump will also remove water at a rate of 2.8 [GPM]. A six-foot (6') drain hose is provided to connect from the drain pump to the wall connection. **Not following these guidelines will cause premature pump failure resulting in the voiding of your pump warranty.**

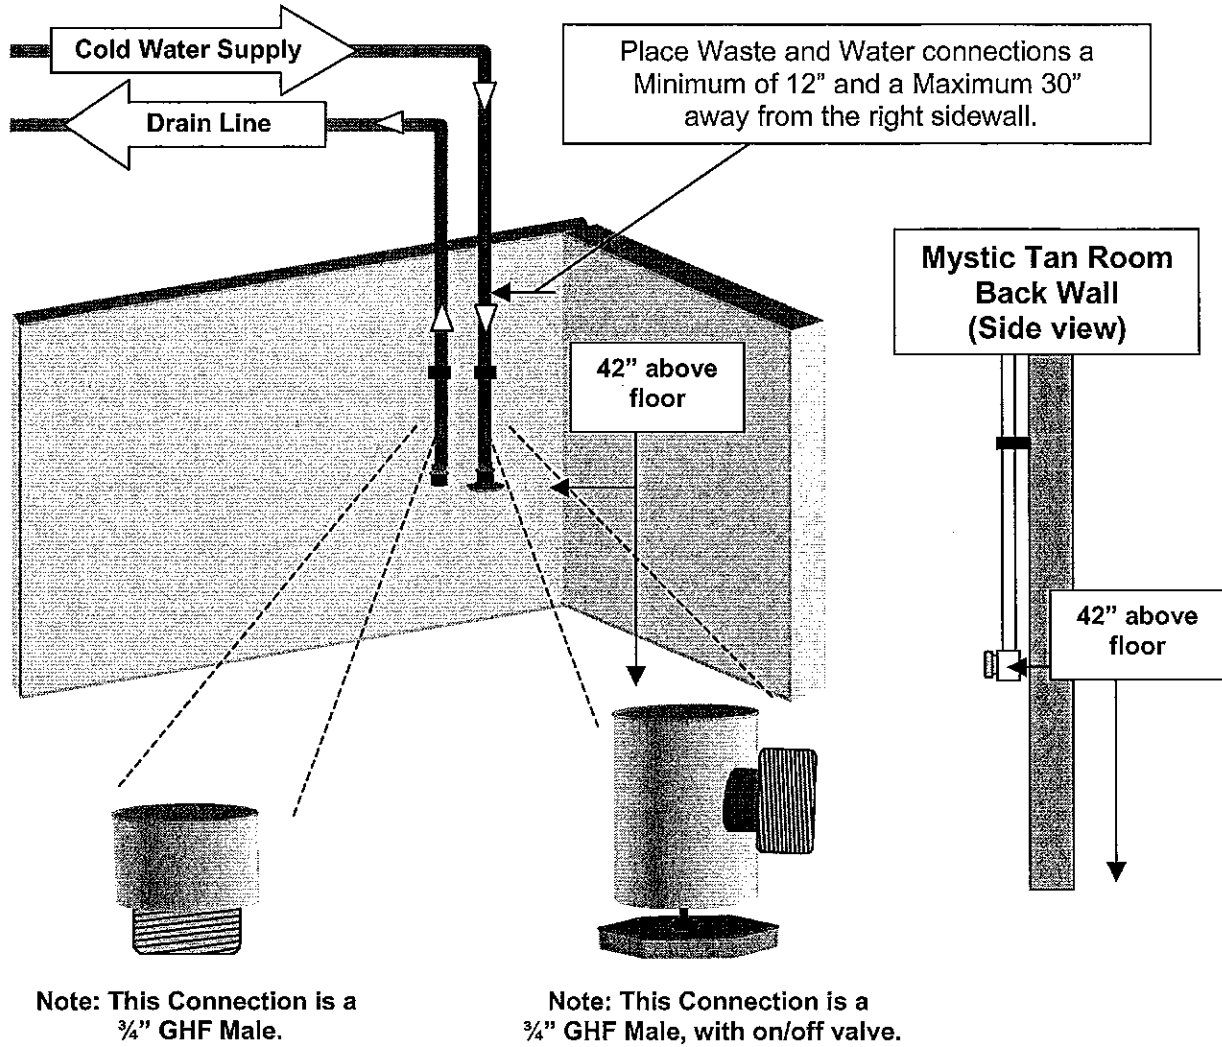


Important: We recommend that the water supply to the Mystic Tan booth be turned off each night using the recommended shut-off valve.



Diagram 6 In-Ground Plumbing (New Construction) - Equipment Model:(MTM-2500)


Important (please read):

The discharge pump (provided) is capable of pumping 12' in height and 48' in total length (60' of head pressure or approximately 30 PSI). The discharge pump will also remove water at a rate of 2.8 [GPM]. A six-foot (6') drain hose is provided to connect from the drain pump to the wall connection. **Not following these guidelines will cause premature pump failure resulting in the voiding of your pump warranty.**

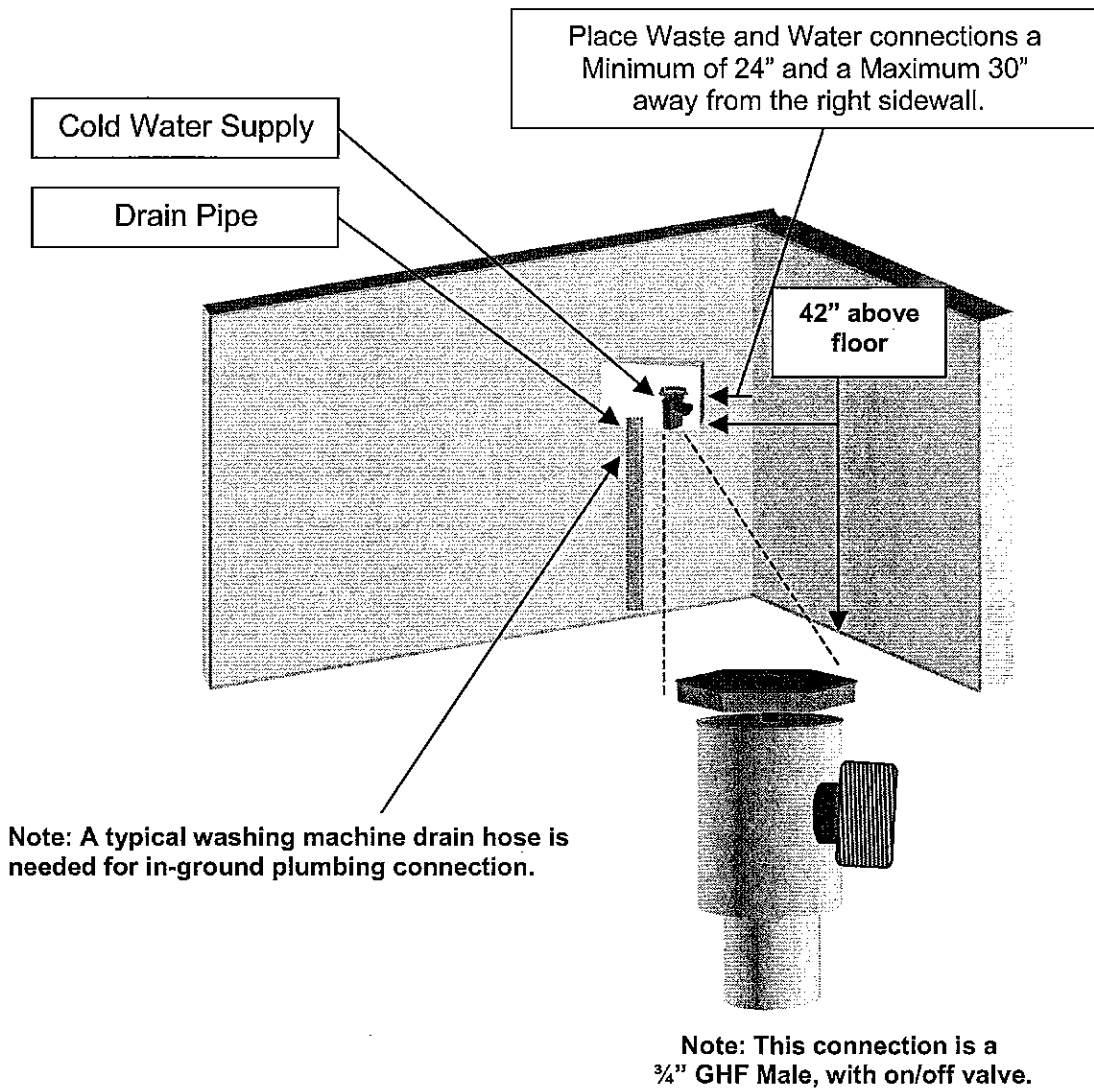


Important: We recommend that the water supply to the Mystic Tan booth be turned off each night using the recommended shut-off valve.

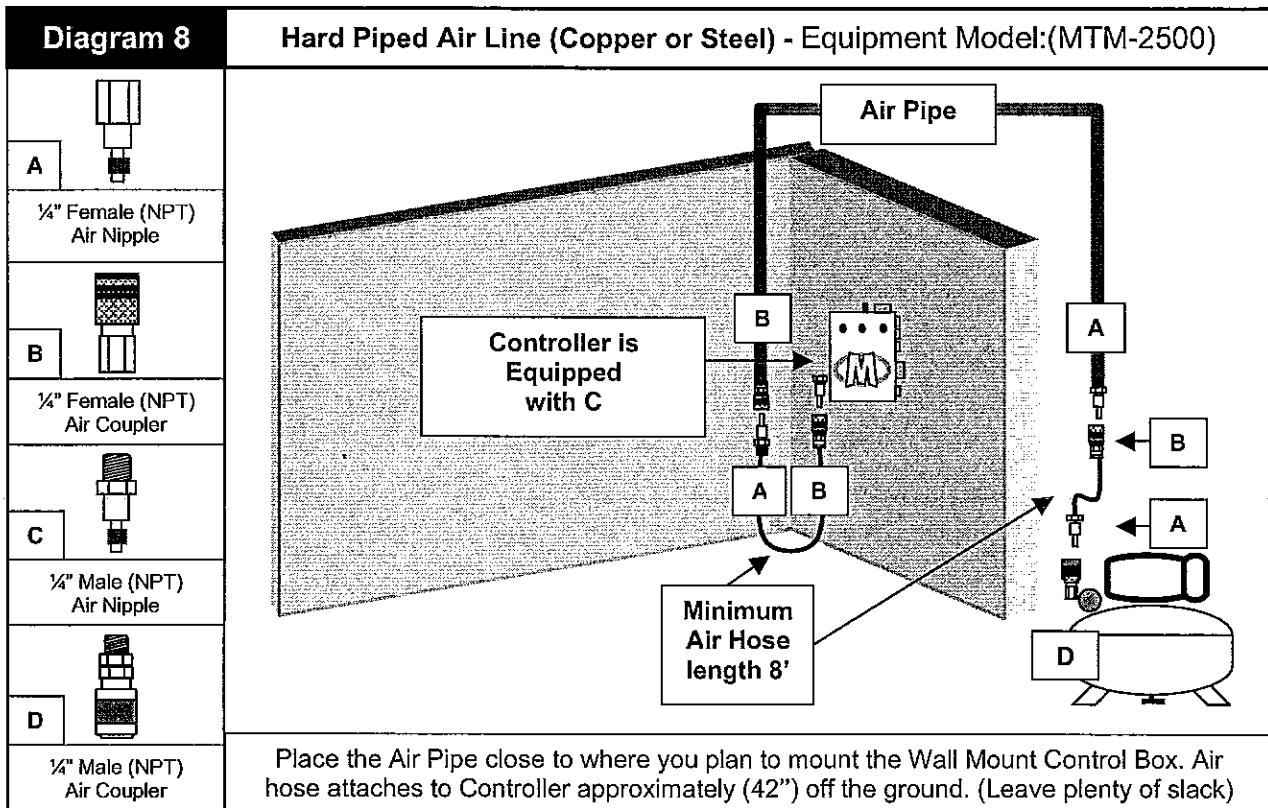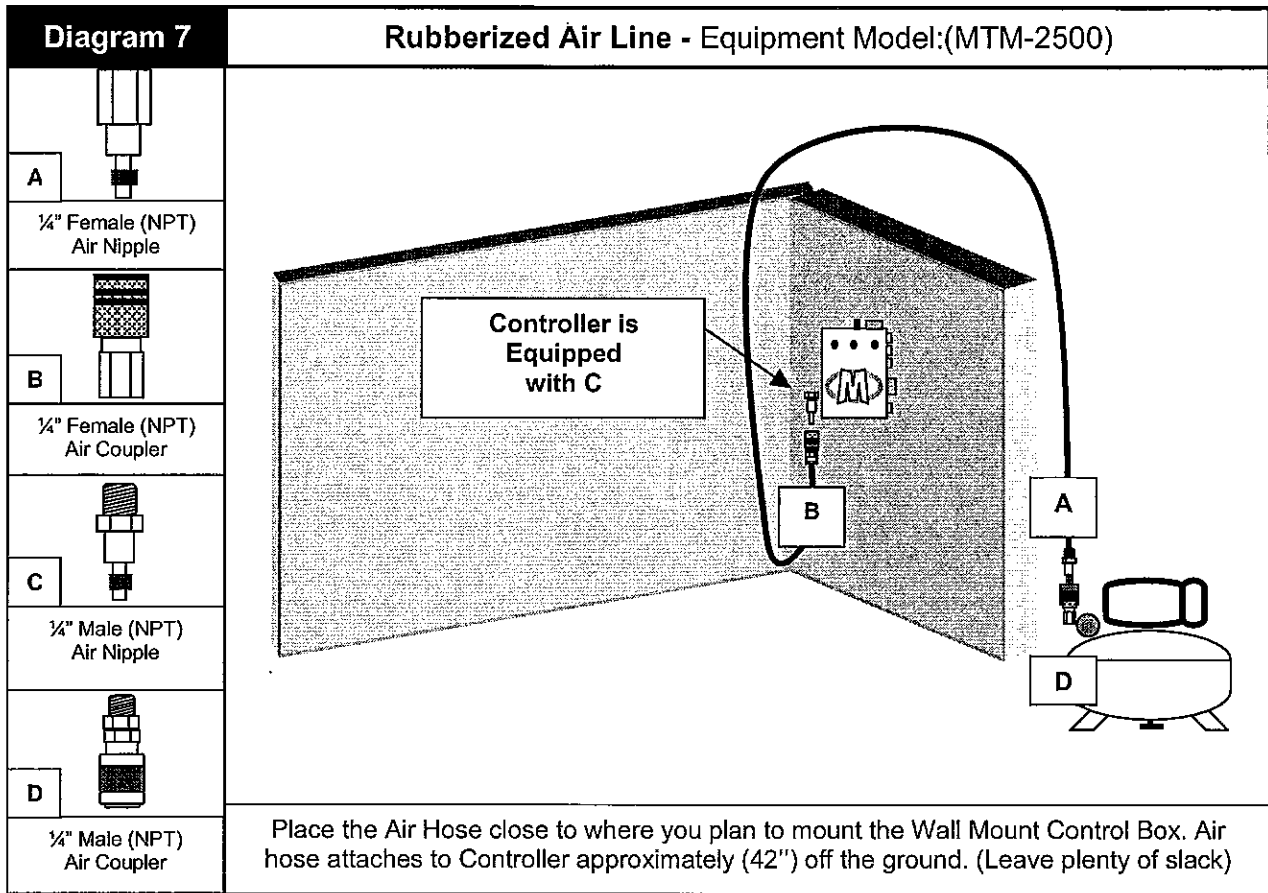

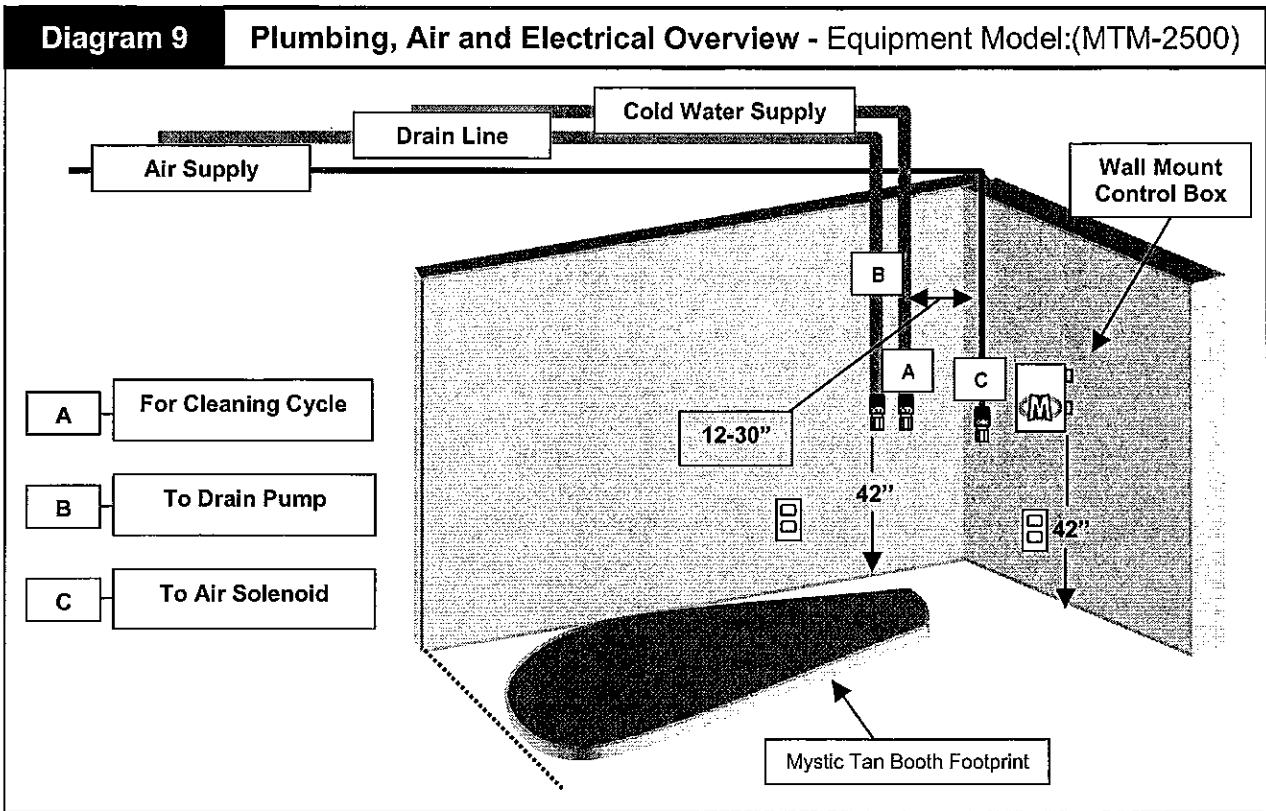

Important: Plumbing shut-off valve must be accessible at all times.

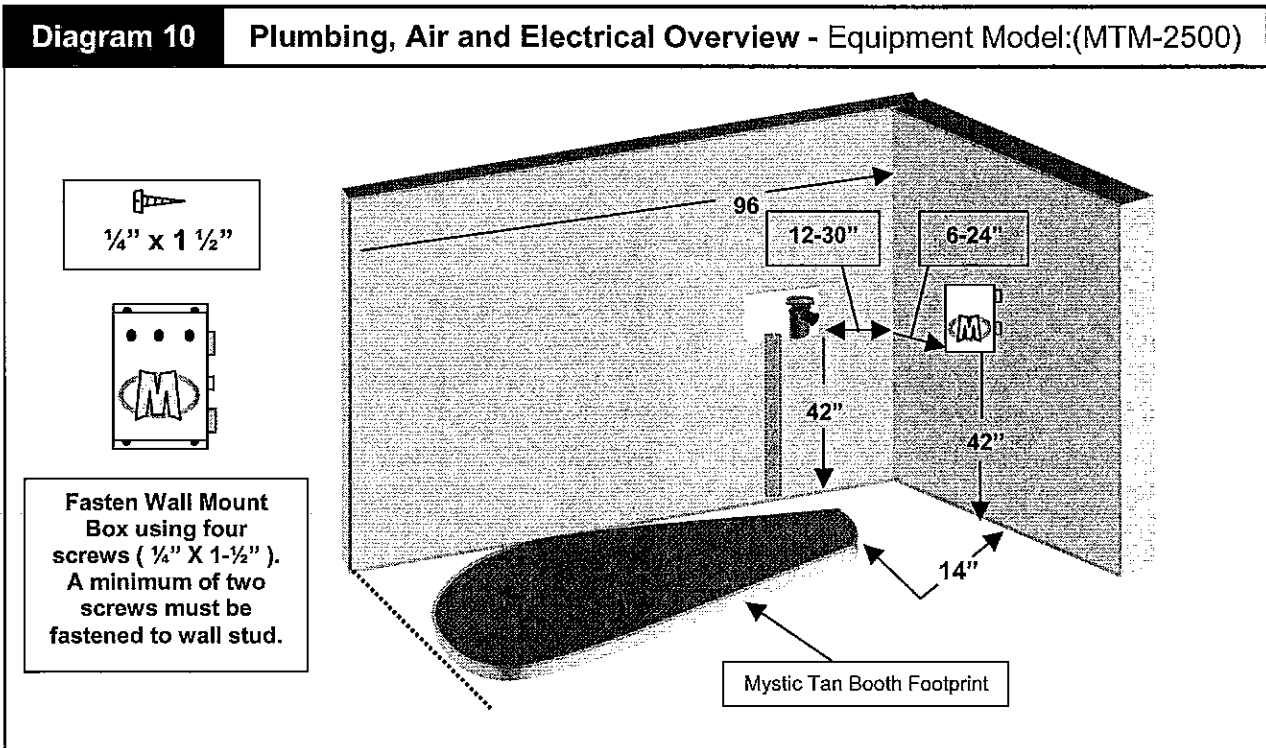

Important: Plumbing shut-off valve must be accessible at all times.